

**Hydronic heat produces
a uniform and temperate
supply air temperature
eliminating hot/cold spikes
in the home**



- Significant energy savings:
 - ECM motor available on all models
- Heating Capacity: 25,000 to 110,000 BTU.
- Add on air conditioning capacity: 2 to 4 tons.
- Compatible with a hot water heater or boiler.
- Simple, straightforward installation. Saves time.
- May qualify for energy efficiency programs or rebates in your area.

Output

Model AH-U-S4A-24-P16 (34,000 to 85,000 BTUH)

Install up to 2 tons of add-on air conditioning

Model AH-U-S2A-30-P16 (25,000 to 56,000 BTUH)

Install up to 2.5 tons of add-on air conditioning

Model AH-U-L2A-36-P16 (25,000 to 68,000 BTUH)

Install up to 3 tons of add-on air conditioning

Model AH-U-L4A-36-P16 (37,000 to 110,000 BTUH)

Install up to 3 tons of add-on air conditioning

Model AH-U-L2B-48-P16 (37,000 to 79,000 BTUH)

Install up to 4 tons of add-on air conditioning

Setting a new standard
for energy efficient, clean air homes




Visit us at www.lifebreath.com

Model Specifications

	AH-U-S4A-24-P16	AH-U-S2A-30-P16	AH-U-L2A-36-P16	AH-U-L4A-36-P16	AH-U-L2B-48-P16
Voltage	120 VAC 60 Hz	120 VAC 60 Hz	120 VAC 60 Hz	120 VAC 60 Hz	120 VAC 60 Hz
Hp	1/3	1/3	1/2	1/2	1/2
Amps (Total)	8	8	10.6	10.6	12.2
Water Connections	1/2" (13 mm) Copper Soldered Connection	1/2" (13 mm) Copper Soldered Connection	1/2" (13 mm) Copper Soldered Connection	3/4" (19 mm) Copper Soldered Connection	1/2" (13 mm) Copper Soldered Connection
Airflow (High)					
.25 in. wg	1030 CFM	1280 CFM	1402 CFM	1350 CFM	1967 CFM
.5 in. wg	890 CFM	1075 CFM	1220 CFM	1180 CFM	1639 CFM
Net Weight	111 lbs. (50.3 Kg)	111 lbs. (50.3 Kg)	121 lbs. (54.9 Kg)	121 lbs. (54.9 Kg)	135 lbs. (61.2 Kg)
Shipping Weight	130 lbs. (59.0 Kg)	130 lbs. (59.0 Kg)	140 lbs. (63.5 Kg)	140 lbs. (63.5 Kg)	155 lbs. (70.3 Kg)


Models:

AH-U-S4A-24-P16
AH-U-S2A-30-P16

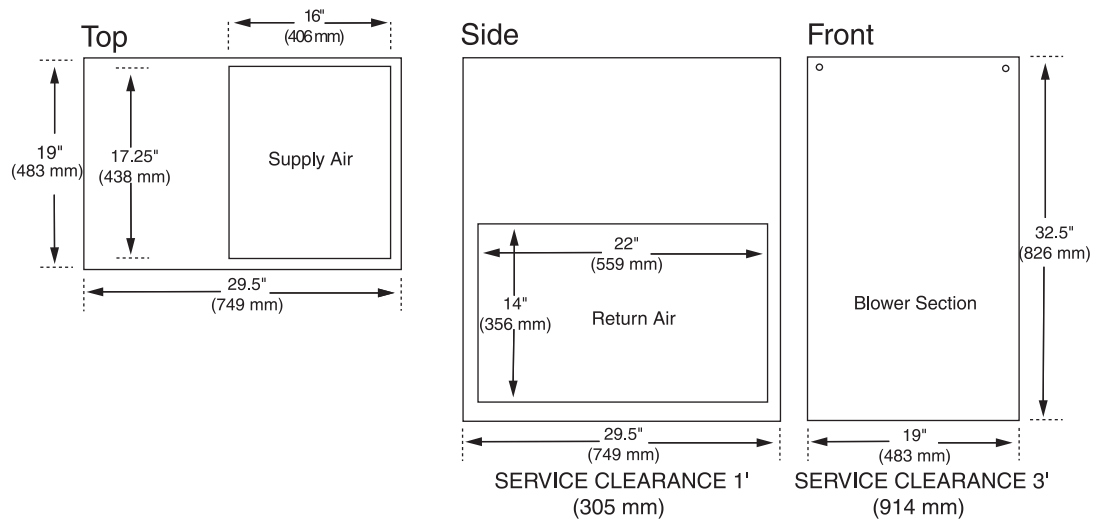

Models:

AH-U-L2A-36-P16
AH-U-L4A-36-P16
AH-U-L2B-48-P16

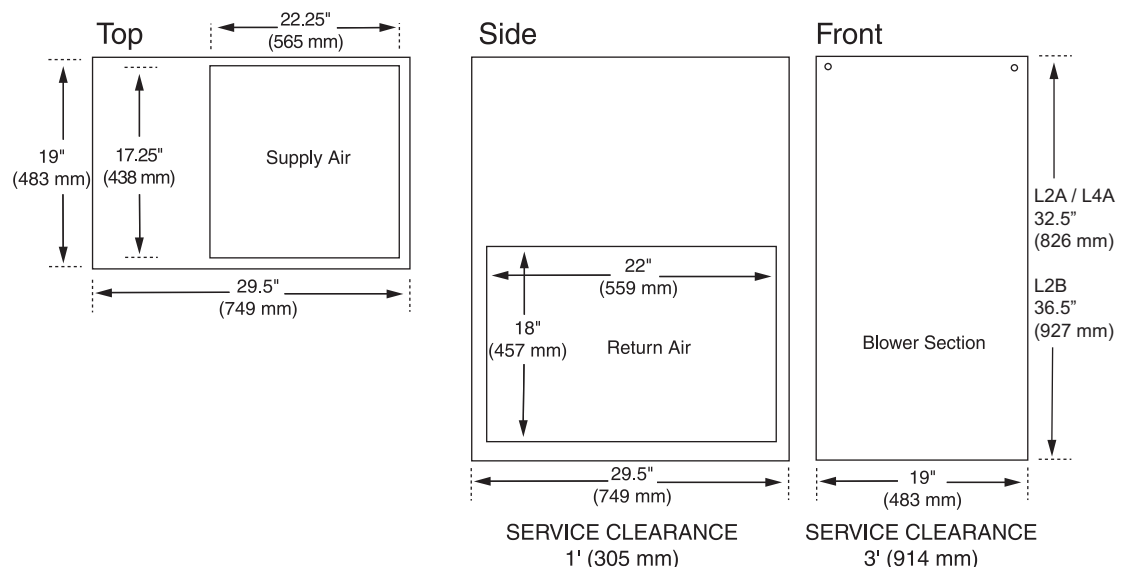

Note:

All units have upflow configuration
5 year replacement parts warranty

Manufacturer reserves the right to change specifications without notice.